

## LAS30-57CN-RJ45 Single Port POE Midspan

### Key Features

- RoHS compliant
- Compatible With All IEEE pre 802.3af, 802.3at and Legacy Powered Devices
- Input voltage:90Vac~264Vac
- Support 300Vac input for long time work
- Output over current protection
- Short circuit protection
- Surge protection
- CE mark



### Description

Hikvision POE midspan is designed to extract power from a conventional twisted pair Category 5 Ethernet cable, conforming to the IEEE 802.3at Power-over-Ethernet (PoE) standard.


The converter signature and control circuit provides the PoE compatibility signature and power classification required by the Power Sourcing Equipment (PSE) before applying up to 30W power to the port.

| Model                   | LAS30-57CN-RJ45                                                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage           | AC100V~240V                                                                                                                                                 |
| Output Voltage Range    | 56V (-4%~+2%)                                                                                                                                               |
| Output Power            | 30W Max                                                                                                                                                     |
| Pass Through Data Rates | 10/100/1000 Mbps                                                                                                                                            |
| Ports                   | Two 10/100/1000M adaptive RJ45 ports, one is DATA/IN, another is PoE/DATA                                                                                   |
| LED Indicator           | Power & PoE Status(The module operates normally when MID and END are on)                                                                                    |
| Base Function           | Compliance to IEEE 802.3 at/af Standard                                                                                                                     |
| Protection Methods      | Output Over Current Protection, Short Circuit Protection                                                                                                    |
| EMC standard            | AC port : EN 61000-4-5 criterion B, L-N 2 kV, L,N-PE 4 kV<br>PoE port: 1kV differential mode (criterion B)<br>Eth port: 1kV differential mode (criterion B) |



|                       |                           |
|-----------------------|---------------------------|
| Operating Humidity    | 5% ~ 90%                  |
| Weight                | 473g                      |
| Dimension             | 185mm*70.8mm*37mm (L*W*H) |
| Operating Temperature | -20 ~ 60 °C               |

## Dimensions

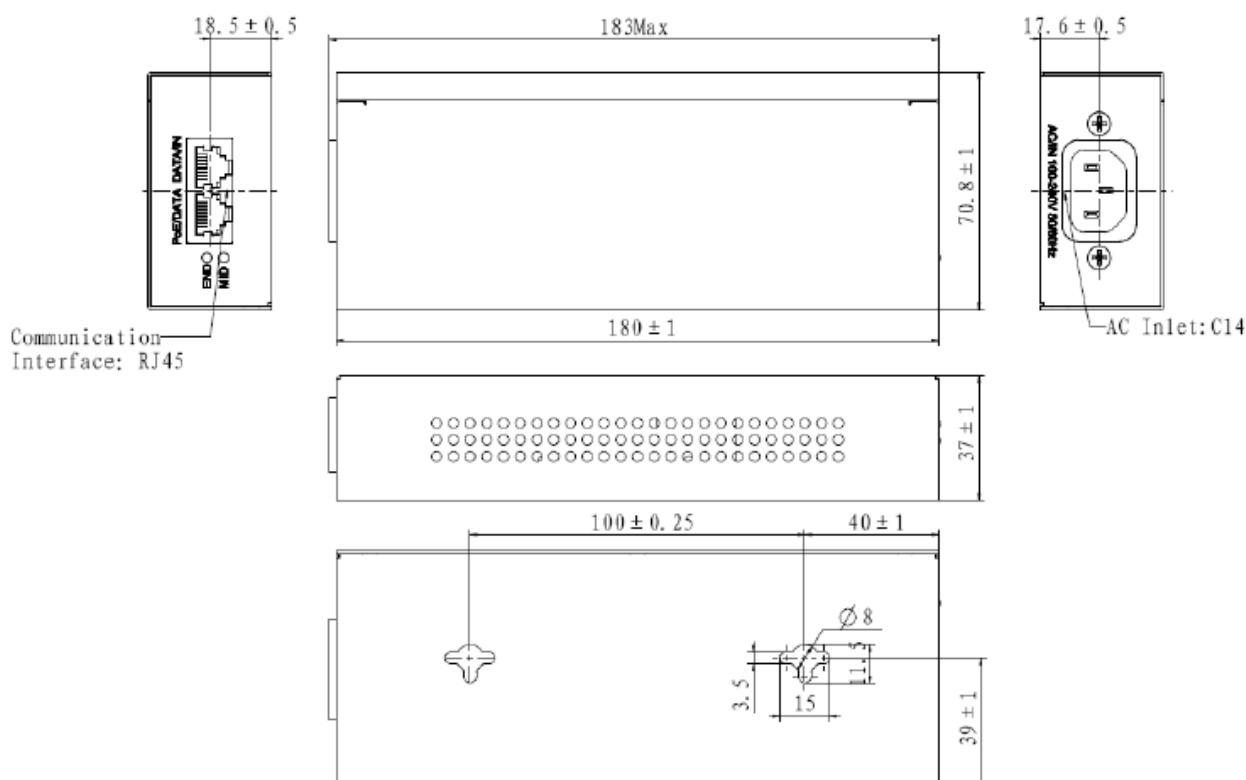

Distributed by

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761